


REVOLVE SERIES

Tests Performed -- Results Conform

Test	Standard Used	Min. Requirements	Results
Water Absorption	ISO 10545-3	≤ 0.5%	Conforms
Bending / Breaking Strength	ISO 10545-4	> 1300N	Conforms
Modulus of Rupture	ISO 10545-4	> 35N/mm ²	Conforms
Dynamic C.O.F.	ANSI A137.1/2012	> 0.42	Conforms
Deep Abrasion Resistance	ISO 10545-6	≤ 175 mm ³	Conforms
Chemical Resistance	ISO 10545-13	min. UB	Conforms
Frost Resistance	ISO 10545-12	Required	Conforms
Stain Resistance	ISO 10545-14	> Class 3	Conforms

Technical data is supplied by the manufacturer and is subject to change at any time. Olympia does not provide warranties as to the specifications of any product.

Colour Variation

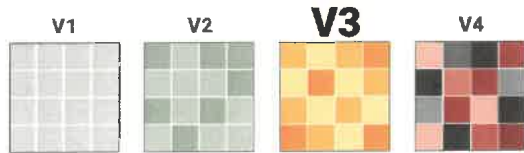

Member



Member of Canada
Green Building
Council



Member of U.S.
Green Building
Council



The Terrazzo, Tile, and
Marble Association of
Canada



Ceramic Tile
Distributors of
America (CTDA)



Marble Institute
of America

For information concerning LEED, please
contact our Sales Representative

Examples of Recommended Applications

Residential Commercial



Indoor



Outdoor



Wall



Floor



Packing Details

TILE SIZE	PC/BOX	SF/BOX	LB/BOX	BOX/PAL
10" x 20" Matte	13	17.57	57.59	64
10" x 20" 3D Decor	12	16.14	53.16	64
24" x 48" Matte	2	15.37	63.38	40

olympiatile+stone®

