


## NEOPOLIS SERIES

Tests Performed -- Results Conform

Test	Standard Used	Min. Requirements	Results
Water Absorption	ASTM C-373	< 0.5%	Conforms
Bending / Breaking Strength	ASTM C-648	≥ 250 lbs	Conforms
Dynamic Co-efficient of Friction	ANSI A137.1/2012	≥ 0.42	Conforms
Deep Abrasion Resistance	ASTM C-1243	≤ 175 mm <sup>3</sup>	Conforms
Scratch Hardness	MOHs Scale	MOHs 5	Conforms
Chemical Resistance	ASTM C-650	min. UB	Conforms
Frost Resistance	ASTM C-1026	Required	Conforms
Stain Resistance	ASTM C-1378	> Class 3	Conforms

Technical data is supplied by the manufacturer and is subject to change at any time. Olympia does not provide warranties as to the specifications of any product.

### Colour Variation

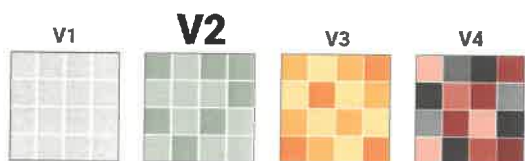

### Member



Member of Canada Green Building Council




Member of U.S. Green Building Council

TTMAC ACTTM

The Terrazzo, Tile, and Marble Association of Canada



Ceramic Tile Distributors of America (CTDA)



Marble Institute of America

For information concerning LEED, please contact our Sales Representative

### Examples of Recommended Applications

Residential Commercial



Indoor



Outdoor



Wall



Floor



### Packing Details

TILE SIZE	PC/BOX	SF/BOX	LB/BOX	BOX/PAL
12" x 24" Matte	9	17.44	60.39	32

olympiatile+stone®

