


ESSENTIAL SERIES

Tests Performed -- Results Conform

Test	Standard Used	Min. Requirements	Results
Water Absorption	ASTM C-373	< 0.5%	Conforms
Dynamic C.O.F.	ANSI A137.1-2012	≥ 0.42	Conforms
Bending / Breaking Strength	ASTM C-648	≥ 250 lbs.	Conforms
Deep Abrasion Resistance	ASTM C-1243	≤ 175 mm ³	Conforms
Scratch Hardness	MOHs Scale	MOHs 5	Conforms
Chemical Resistance	ASTM C-650	min. UB	Conforms
Frost Resistance	ASTM C-1026	Required	Conforms
Stain Resistance	ASTM C-1378	> Class 3	Conforms

Technical data is supplied by the manufacturer and is subject to change at any time. Olympia does not provide warranties as to the specifications of any product.

Colour Variation

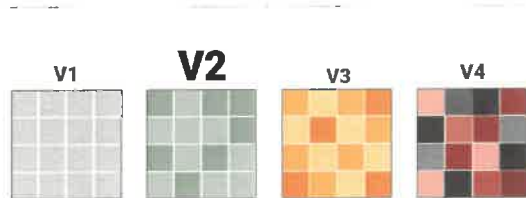

Member



Member of Canada
Green Building
Council




Member of U.S.
Green Building
Council

TTMAC  ACTTM

The Terrazzo, Tile, and
Marble Association of
Canada



Ceramic Tile
Distributors of
America (CTDA)



Marble Institute
of America

For information concerning LEED, please
contact our Sales Representative

Examples of Recommended Applications

Residential Commercial



Indoor



Outdoor



Wall



Floor



Packing Details

TILE SIZE	PC/BOX	SF/BOX	LB/BOX	BOX/PAL
12" x 24" Matte	8	15.50	60.96	32
24" x 24" Matte	6	23.25	91.68	24

olympiatile+stone[®]

