


## SALT SERIES Glazed Porcelain

### Tests Performed -- Results Conform

Test	Standard Used	Min. Requirements	Results
Water Absorption	ASTM C-373	≤ 3.0%	Conforms
Bending / Breaking Strength	ASTM C-648	≥ 250 lbs.	Conforms
Dynamic Coefficient of Friction	ANSI A137.1/2012	0.42	Conforms
Visible Surface Abrasion Resistance	ASTM C-1027	PEI-4	Conforms
Chemical Resistance	ASTM C-650	min. UB / GA / GLA	Conforms
Frost Resistance	ASTM C-1026	Required	Conforms
Stain Resistance	ASTM C-1378	≥ Class 3	Conforms

Technical data is supplied by the manufacturer and is subject to change at any time. Olympia does not provide warranties as to the specifications of any product.

### Colour Variation

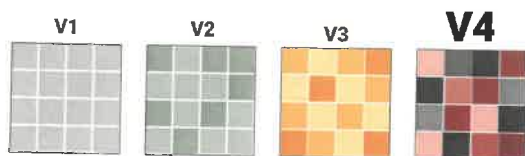

### Member



### Examples of Recommended Applications

Residential



Commercial



Indoor



Wall



Floor



### Packing Details

TILE SIZE	PC/BOX	SF/BOX	LB/BOX	BOX/PAL
12" x 24" Matte	7	13.56	49.84	40
10" x 22" Glossy	10	14.79	40.30	48
4" x 12" Glossy	30	9.69	25.50	88

**olympiatile+stone®**

