


NABI SERIES

Tests Performed – Results Conform

| Test | Standard Used | Min. Requirements | Results |
|----------------------------------|------------------|-----------------------|----------|
| Water Absorption | ISO 10545-3 | ≤ 3.0% | Conforms |
| Dynamic Co-efficient of Friction | ANSI A137.1/2012 | > 0.42 | Conforms |
| Slip Resistance | DIN 51130/51097 | R-9 | Conforms |
| Bending / Breaking Strength | ISO 10545-4 | >1300N | Conforms |
| Deep Abrasion Resistance | ISO 10545-6 | ≤ 175 mm ³ | Conforms |
| Chemical Resistance | ISO 10545-13 | min. UB | Conforms |
| Frost Resistance | ISO 10545-12 | Required | Conforms |
| Stain Resistance | ISO 10545-14 | Class 3 | Conforms |

Technical data is supplied by the manufacturer and is subject to change at any time. Olympia does not provide warranties as to the specifications of any product.

Colour Variation

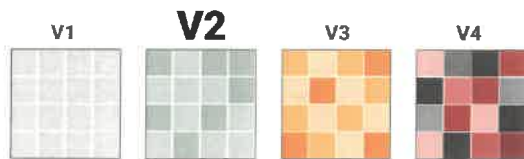

Member



Member of Canada
Green Building
Council



Member of U.S.
Green Building
Council



Ceramic Tile
Distributors of
America (CTDA)



Marble Institute
of America

For information concerning LEED, please contact
our Sales Representative

Examples of Recommended Applications

Residential Commercial



Indoor



Outdoor



Wall



Floor



Packing Details

| TILE SIZE | PC/BOX | SF/BOX | LB/BOX | BOX/PAL |
|----------------|--------|--------|--------|---------|
| 8" x 48" Matte | 5 | 12.92 | 49.80 | 48 |

olympiatile+stone®

